



SPEAKER \_\_\_\_\_

SUBJECT \_\_\_\_\_

DATE \_\_\_\_\_


# MC68000

TOD

- dp not supported!
- Metering code
- VAX Block Driver Skeleton h.p.c? t.m.c?

DRIVE #  $\downarrow$   $\leftarrow$  Read-after-write verify?  
 EJECT ON CLOSE

- Minor devs  
 Major = BLK/CHAR  
 BP flags  $\uparrow$ ?

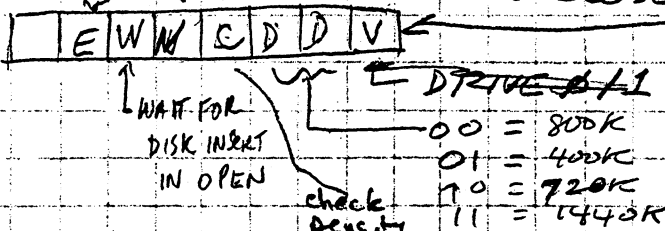

1dev/dsk/cNd $\phi$ s $\phi$  N = 9 400K GCR  
 d1 8 800K GCR  
 10 720K MFM  
 11 1440K MFM

2-digit "N" is base

c8d $\phi$ s $\phi$  = 800K GCR ?

DL: c8d $\phi$ sX X = 0 800K I FREEZE THIS  
 1 400K  
 2 720K  
 3 1440K

- Installation code for testing; Built-in for release

- Memo on drive numbering & options  
 JK, ~~PHIL~~, DWB, PHIL, RON, VLB

- ~~GINSU METD PM YHUVS 1800~~

- Maybe do 250 ms timer? (16 ticks)

Yes. Pd.h timeouts  
 and seldisk.c.  
 T/DISKWAIT or  
 TO\_INSERT?

- Task TIMEOUT

- Busy wakeups!

~~T/BUSY wakeup~~